


SOUNDBLOCK ROLL PRODUCT



MATERIAL CLOSE UP - FRONT - SMOOTH SIDE

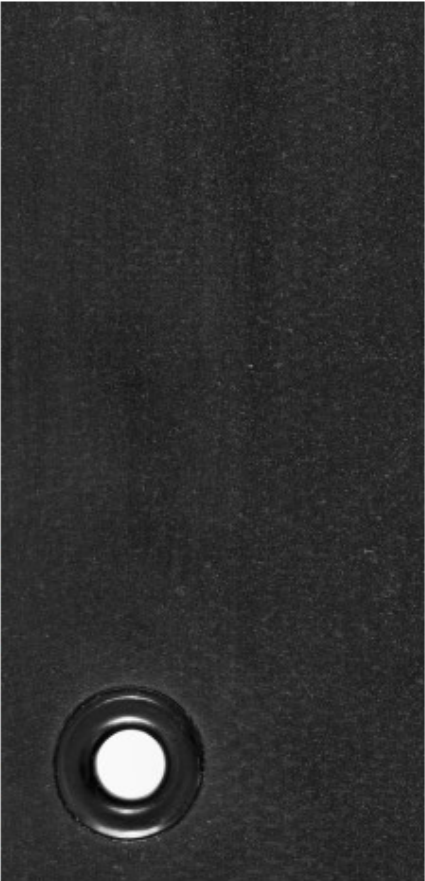

MATERIAL CLOSE UP - BACK - TEXTURED SIDE



AVAILABLE COLORS:



FENCESCREEN MATERIAL SPECIFICATIONS	
MATERIAL COMPOSITION: PROPRIETARY COMPOSITION W/ HIGH UV-RESISTANCE	
PROPERTIES	RESULTS
Length	192"
Width	48"
Material Thickness	1/8"
Tensile Strength	Min. 510 PSI
Acoustical Rating	Minimum STC 32 per ISO 16283 (part III) - 1981 DIN: 52210 & ISO 140 (part III)
Minimum Sound Attenuation	24 DBA @ 100Hz/16 DBA @ 40Hz
Heat Tolerance	200° Fahrenheit (93° Celsius) for 7 Days
Freezing Point	-40° Fahrenheit (-40° Celsius)
Visibility Blockage	100%

850  
SERIES

SOUNDBLOCK



DRAWING # 850SERIES-SOUNDBLOCK

888-313-6313  
WWW.FENCESCREEN.COM